

# WALL MOUNTED SINK TOP

November 2006

### **Special Features**

- ▲ HYGIENIC DESIGN
- ▲ LARGE FLAT BOTTOM BOWL WITH EASY CLEAN RADIUSED CORNERS
- ▲ HIGH SPLASHBACK

## Description

The wall mounted sink top is ideal for washing and drying bulky utensils such as those found in kitchens, food processing and preparation areas. The sink top has a large flat bottom bowl, and is supplied with a stainless steel splashback and wall mounting brackets.

#### Construction

The wall mounted sink top is manufactured in one piece without joints or crevices from grade 304 stainless steel, with all exposed surfaces polished to a satin finish.

A large flat bottom bowl with radiused easy to clean internal corners is

incorporated into the right hand or left hand side of the top.

The wall mounted sink top is produced with either one or two tap holes and is supplied as standard with a combined waste and overflow fitting, plug and chain, together with a stainless steel splashback and wall mounting brackets.

#### Option

▲ High neck sink taps (see catalogue section 6 - product code 6712HNSHC).






5 Brearley Court, Baird Road, Waterwells Business Park, Quedgeley, Gloucester GL2 2AF Tel: 01452 721211 Fax: 01452 721231 Web: www.acornpowell.co.uk



# Technical Specification: Wall Mounted Sink Top

5 Brearley Court, Baird Road, Waterwells Business Park, Quedgeley, Gloucester GL2 2AF Tel: 01452 721211 Fax: 01452 721231 Web: www.acompowell.co.uk

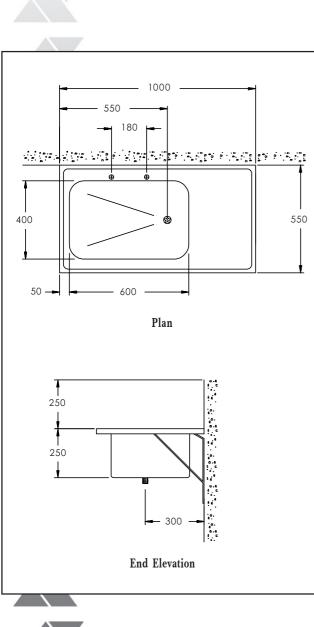







### Waste Outlet

The wall mounted sink top is supplied with a 38 mm ( $1\frac{1}{2}$  in) BSP combined waste and overflow fitting plug and chain.

# **Tap Hole Positions**

The wall mounted sink top is produced with either one tap hole, which can be right hand or left hand, or two tap holes.

### Tap Hole Size

The tap hole size is 22 mm diameter.

#### **Fittings**

The sink top is supplied with a stainless steel splashback and two wall mounting brackets.

# Product Code Selection for Order or Quotation

**1. Base Product Code 285-wall mounted sink top** 

#### 2. Bowl Position (as facing)

R-right handL-left hand

#### 3. Tap Hole Position

R-right hand
L-left hand
T-two

#### 4. Option

□-6712HNSHC-high neck pillar taps - pair

For details of water controllers, taps and valves see catalogue section 6.