

MONOBLOCK MIXING TAP

PRODUCT CODE


6742MMT

November 2006

Description

The monoblock mixing tap is suitable for use on wash basins and sinks, where there is a risk of scalding. It is ideal for use in hospitals, homes for the elderly and infirm, schools and educational establishments, leisure facilities and all commercial applications. The tap provides control of both flow and temperature when mixing hot and cold water for single outlets. The maximum temperature setting is by tamperproof adjustment that limits the discharge water temperature preventing accidental scalding. For added economy the water discharge rate can also be adjusted to high or low flow. Operation is by a single lever with on/off action and temperature selection is from cold through to the maximum setting. The monoblock mixing tap is manufactured from brass with a chrome plated finish and incorporates a ceramic disc cartridge for drip-free action and a flow diffuser in the outlet. The tap has two 10 mm diameter inlet tails for hot and cold water supplies and is supplied as standard with two 10 x 15 mm straight connectors.

Product Range

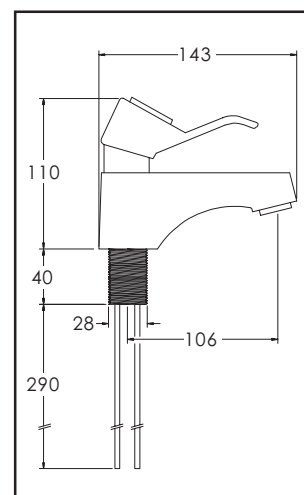

Product Code

□6742MMT-monoblock mixing tap